


BDM-600 Wiring Diagram, Single phase for Australia

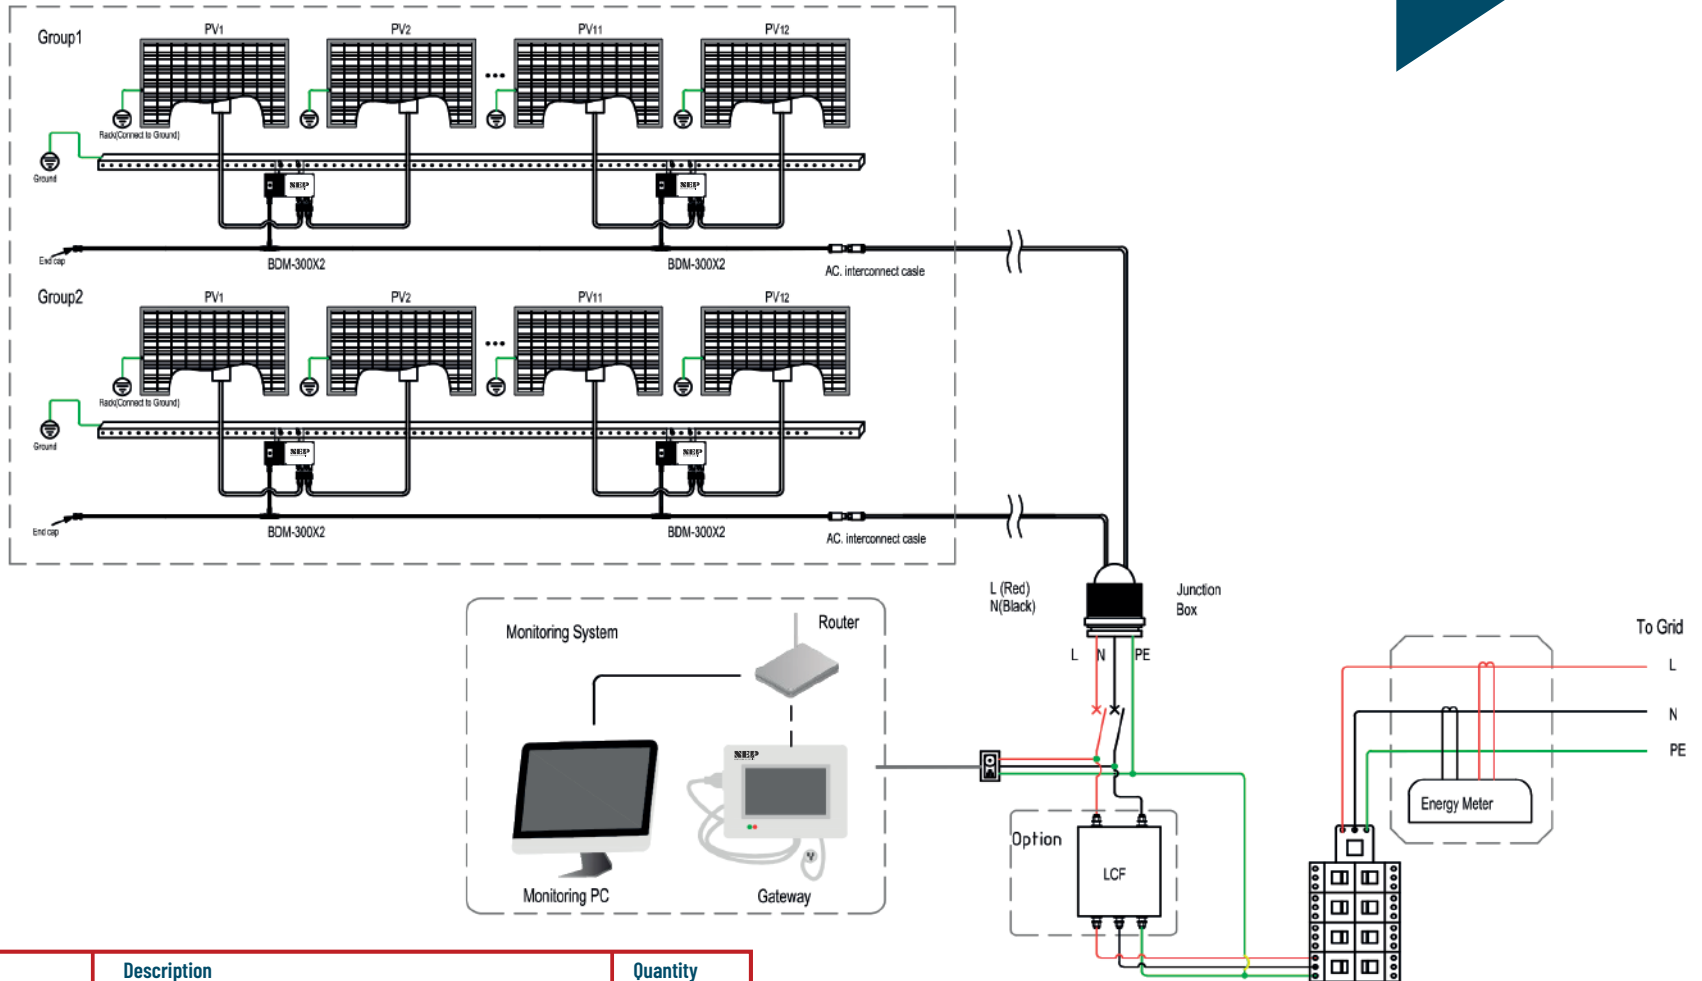

7.5kW PV System BOM

Specification	Description	Quantity
300 W PV module	PV PANELS	24
BDM-300X2	Dual Input Micro Inverter	12
BDG-256	Communication Gateway	1
LCF(Line Communications Filter)		option
Trunk cable drops	2m or 4m separate	12
Male Connector		2
AC interconnect cable	16 feet AC cable w/ female conector	2
End cap	male end cap w/ female connector	2

Quantity:		Material:			
Designed by:	Checked by:	Approved by:	Date:	Edition:	Scale:
Title: 7.2kW PV System (AU)					
Drawing number:				Sheet 1 of 1	

