





BDM-600 (BDM-300X2) MICROINVERTER



Features

- Low cost \$/watt micro inverter
- High continuous output power up to 550Wac, recommended for dual max 360W solar panel
- High efficiency with 95.5% CEC
- Globally certified for UL1741, SAA, TUV, VDE-AR-N 4105, VDE 0126, G83/2, CEL 021, IEC61727, EN50438
- Integrated grounding for easy installation
- NEMA-6/IP-66/IP-67 enclosure rating
- Integrated monitoring and power line communication with RDG-256 gateway
- Can connect with BDM-300 and BDM-250

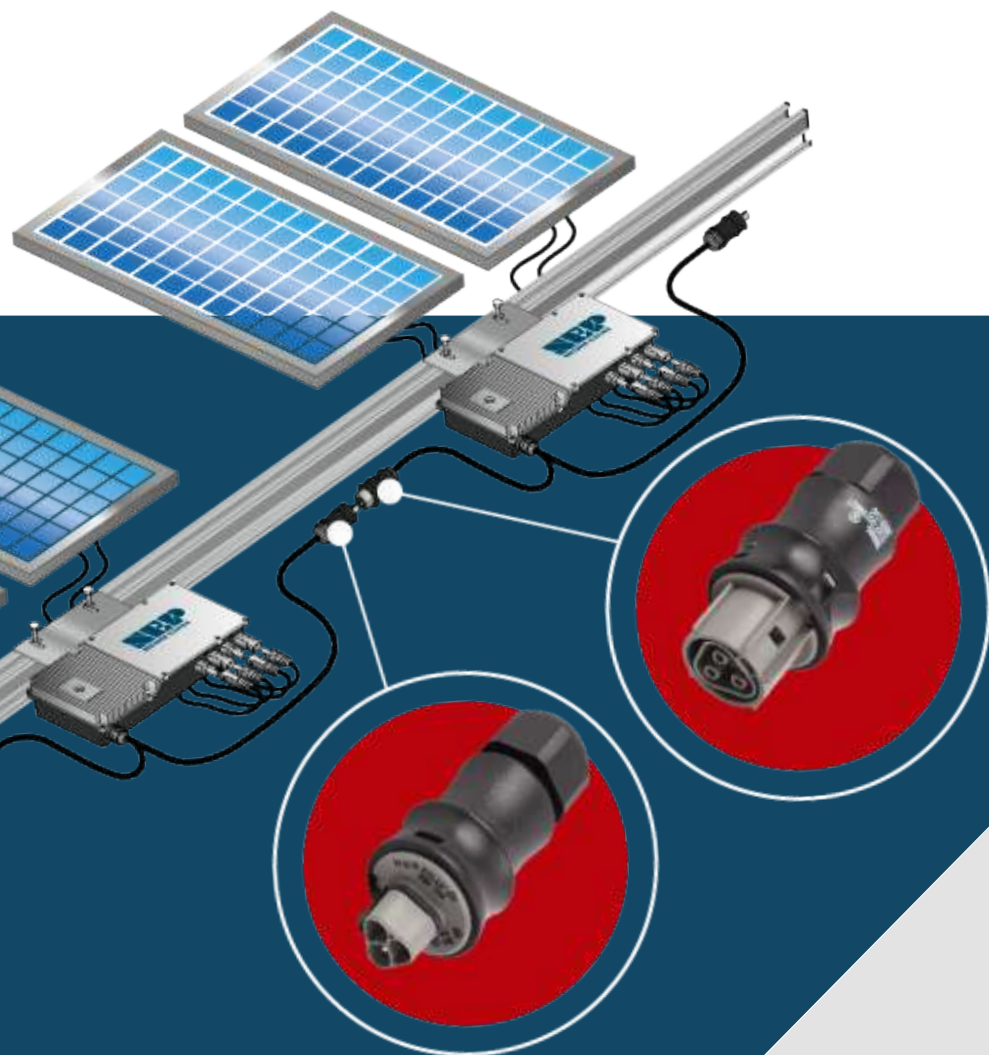

northernep.com




10.91"

1.97"

5.20"

Important product information

- NEP is committed to developing Clean, Reliable, Convenient and Efficient (CARE) products for our customers worldwide. Our products have a 10-year warranty.
- NEP microinverters have an isolation transformer and basic isolation between the DC input and the AC output network.

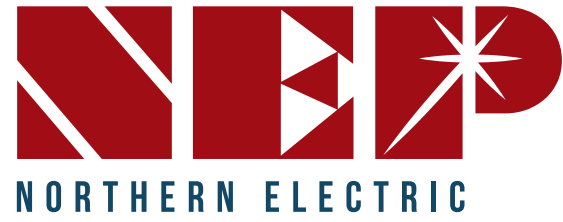

BDM-600 (BDM-300X2) MICROINVERTER



* Grid parameters are configurable through a BDG-256 or BDG-256P3 gateway
 * All NEC required adjustment factors have been considered for AC outputs. AC current outputs will not exceed stated values for Rated Output AC Current

COMPLIANCE

*NEC 2014 Section 690.11 DC Arc-Fault Circuit Protection
 *NEC 2014 Section 690.12 Rapid Shutdown of PV Systems on Buildings
 *NEC 2014 Section 705.12 Point of Connection (AC Arc-Fault Protection)

INPUT(DC)	
Recommended Max PV Power (Wp)	450 x 2
Max DC Open Circuit Voltage (Vdc)	60
Max DC Input Current (Adc)	14 x 2
MPPT Tracking Accuracy	>99.5%
MPPT Tracking Range (Vdc)	22-55
Isc PV (absolute maximum) (Adc)	18 x 2
Maximum Inverter Backfeed Current to the Array (Adc)	0
OUTPUT (AC)	
Peak AC Output Power (Wp)	550
Rated AC Output Power (Wp)	500
Nominal Power Grid Voltage (Vac)	240 208 230
Allowable Power Grid Voltage (Vac)	211-264* 183-229* configurable*
Allowable Power Grid Frequency (Hz)	59.3 a 60.5* configurable*
THD	<3% (at rated power)
Power Factor (cos phi, fixed)	>0.99 (at rated power)
Rated Output Current (Aac)	2.08 2.40 2.17
Current (inrush)(Peak and Duration)	24A, 15us
Nominal Frequency (Hz)	60 50
Maximum Output Fault Current (Aac)	4.4A peak
Maximum Output Overcurrent Protection (Aac)	10
Maximum Number of Units Per Branch (20A) (All NEC adjustment factors have been considered)	7 6 7
SYSTEM EFFICIENCY	
Weighted Averaged Efficiency (CEC)	95.50%
Night Time Tare Loss (Wp)	0.11
PROTECTION FUNCTIONS	
Over/Under Voltage Protection	Yes
Over/Under Frequency Protection	Yes
Anti-Islanding Protection	Yes
Over Current Protection	Yes
Reverse DC Polarity Protection	Yes
Overload Protection	Yes
Protection Degree	NEMA-6 / IP-66 / IP-67
Ambient Temperature	-40°F to +149°F (-40°C to +65°C)
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Display	LED LIGHT
Communications	Power Line
Dimension (W-H-D)	10.91"x5.20"x1.97"(277x132x50 mm)
Weight	6.4 lbs. (2.9 kg)
Environment Category	Indoor and outdoor
Wet Location	Suitable
Pollution Degree	PD 3
Overvoltage Category	II(PV), III (AC MAINS)
Product Safety Compliance	UL 1741 CSA C22.2 No. 107.1 IEC/EN 62109-1 IEC/EN 62109-2
Grid Code Compliance* (Refer to the label for the detailed grid code compliance)	IEEE 1547 VDE-AR-N 4105* VDE V 0126-1-1/A1 G83/2, CEI 021 AS 4777.2 & AS 4777.3,EN50438